



## Raven offers two GPS signal splitters.



The **Bias Tee BT-2DGPS-2DC** is designed to provide two DGPS receivers with a signal from a single GPS antenna. The DGPS signal splitter can expand the use of a single antenna. The signal splitters operate over a frequency range that allow the GPS, Inmarsat, Omnistar, and DGPS radio Beacon signals to be passed to two DGPS receivers. The antenna is powered by the receiver through either the primary or secondary port. The antenna will continue to receive power even if one of the receivers is not functional. This is the great advantage of this type of splitter. This model comes with either TNC or N type connectors.

The **Bias Tee BT-2DGPS** is designed to provide two DGPS receivers with a signal from a single antenna. The signal splitters operate over a frequency range that allow the GPS, Inmarsat, Omnistar, and DGPS radio Beacon signals to be passed to two DGPS receivers. The antenna is powered by the receiver through the primary port. The secondary port provides a signal to the second GPS receiver.

No matter the operating environment, marine, aviation, or land Raven rugged components are built to last. Customer satisfaction is ensured with a full one year warranty.

**RAVEN**

1400 Summit Drive  
Suite 700  
Austin, TX 78728  
Telephone: +1 512 238 5833  
Toll Free: 1 800 460 2167  
[www.starlinkdgps.com](http://www.starlinkdgps.com)

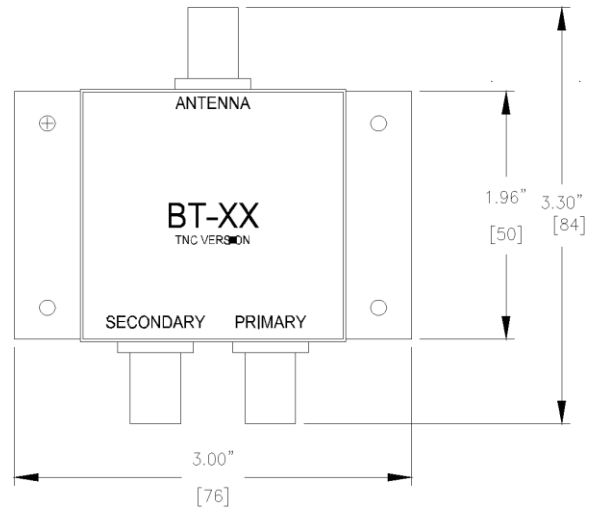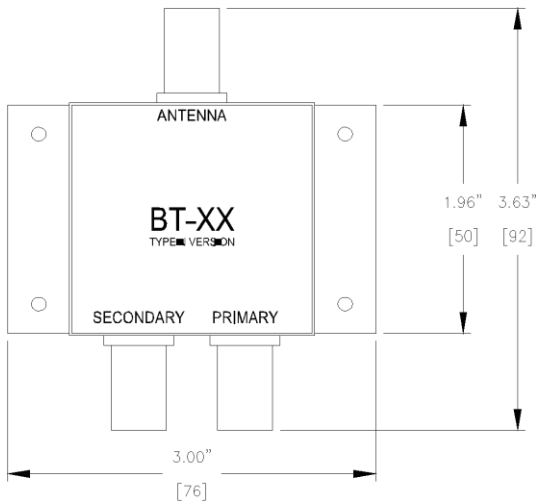

### BT-2DGPS-2DC SPLITTER SPECIFICATIONS

- Weight: 116 g (4.1 oz)
- Dimensions: **TNC** 76 mm W x 84 mm H (3.00" W x 3.30" H)  
**TYPE N** 76 mm W x 92 mm H (3.00" W x 3.63" H)
- Connection: TNC or TYPE N
- Relative Humidity: 0-95% non-condensing
- Operating Temperature: 0° to +50°C
- GPS Signal Loss: 4 dB
- Isolation: >18 dB
- Power: Receiver powers antenna though either primary or secondary port

### BT-2DGPS GPS SPLITTER SPECIFICATIONS

- Weight: 116 g (4.1 oz)
- Dimensions: 76 mm W x 84 mm H (3.00" W x 3.30" H)
- Connection: TNC
- Relative Humidity: 0-95% non-condensing
- Operating Temperature: 0° to +50° C
- GPS Signal Loss: 4 dB
- Isolation: >18 dB
- Power: Receiver powers antenna though primary port

**RAVEN**

**PRECISION**  
Solutions

1400 Summit Drive  
Suite 700  
Austin, TX 78728  
Telephone: +1 512 238 5833  
Toll Free: 1 800 460 2167  
[www.starlinkdgps.com](http://www.starlinkdgps.com)